




Kyla

User Guide



## Smart Temperature/ Humidity Sensor

---

Thanks for using Aztech Kyla product  
If you need support or help,  
please visit [www.kyla.aztech.com](http://www.kyla.aztech.com)

## Product Description

The Smart Temperature/Humidity Sensor monitors home temperature and humidity values anywhere even when out of home. It adopts ultra-low power consumption Zigbee wireless network technology. With dust-proof and insect-proof function, the product is designed to be secured.

With high-precision temperature and humidity built-in sensor, it can perceive and report temperature and humidity conditions in real-time through App. The product is suitable for environmental monitoring in residential, factory buildings, computer rooms, shopping malls, hotels, office buildings, banks, libraries, as well as warehouses and many other places.

# Operation Guide

## Step 1:

Download Aztech Kyla App from  
Google Play/App Store



## Aztech Kyla App




## Step 2:

Login to Aztech Kyla App, then add "Smart Temperature/ Humidity Sensor" to device list to enable the device.


## Step 3:

Remove battery insulation film to power on.

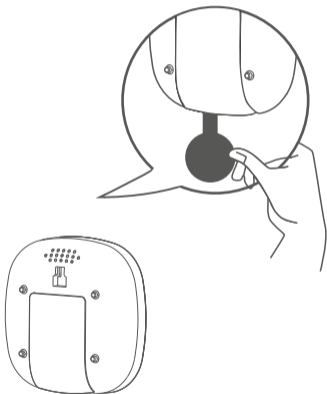


## Step 4:

Following the App instructions, long press the device's networking key until the green LED flashes. The App will be prompted once connected successfully to the network.

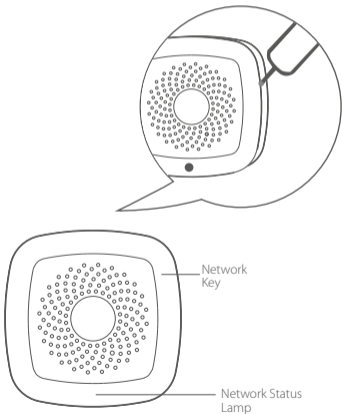


## Step 5:

Tear off the gummed film then stick the equipment to the required area.

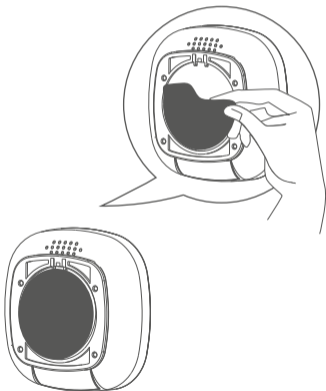

## Step 6:

Note that the mounting base shall be upright as shown on the diagram below. Finally, hang the Smart Temperature/Humidity Sensor onto the mounting base.

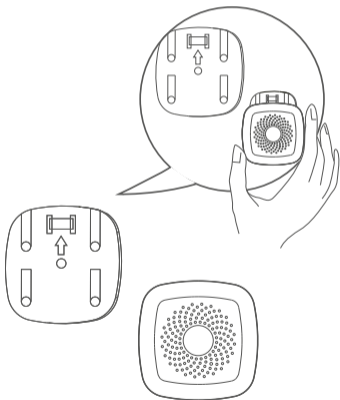



# Technical Specifications

## Working Voltage

DC3V (1\* CR2450 Button Battery)

## Standby Current

$\leq 10\mu\text{A}$

## Networking Mode

Zigbee Ad-Hoc Network

## Wireless Networking Distance

$\leq 100\text{m}$  (Open Area)

## Working Environment

$-15 \sim 60^{\circ}\text{C}$

## Working Humidity

Max 95% RH

## Product Dimensions

79 x 68 x 31mm

# Aztech

©2018 Aztech Technologies Pte Ltd.  
All rights reserved.